


OILFLEX ST

- Application** Suction and delivery of fuel (including unleaded) max. aromatic content 50 %, oil and chemicals, acc. to TESS chemical table, see section 5 Technical Information. Supply hose for oil drilling platforms.
- Users** Construction and building, Maritime/ship, Mechanical industry, Oil and gas.
- Tube** Black nitrile rubber.
- Reinforcement** Synthetic cord with double steel helix and double ground wire.
- Cover** Black neoprene rubber.
- Temperature** -30 °C - +100 °C. For air max. +70 °C.
- Vacuum** 85%.
- Safety factor** Special applications may require different safety factor, for example 1:4.
- Marking** "TESS Oilflex ST 20 BAR WP" (red stripe).
- Accessories** Hose couplings gr. 14, quick couplings gr. 15, hose clamps gr. 16, TESSPRESS gr. 17.
- Remarks** Hose for both suction and delivery. When used for chemicals, consult TESS regarding max. temperature. Stated burst pressure is the minimum and working pressure is based on safety factor 1:3.

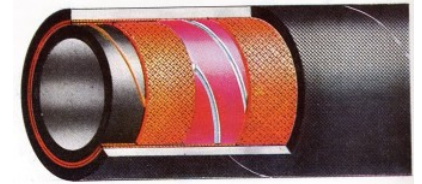

I.D. mm	I.D. inch	O.D. mm	Working pressure BAR	Burst pressure BAR	Bend radius mm	Standard length meter	Weight per m kg	Part no	Full length	1/2 length	Cut length	Stock	Quantity
25,4	1	39	20	60	150	60	0,99	10215-16		On request		●	
32,0	1 1/4	46	20	60	200	60	1,22	10215-20		On request		●	
38,0	1 1/2	53	20	60	230	60	1,60	10215-24		On request		●	
51,0	2	64	20	60	300	60	1,75	10215-32		On request		●	
76,0	3	93,6	20	60	460	60	3,50	10215-48		On request		●	
102,0	4	122	20	60	650	60	5,38	10215-64		On request		●	
127,0	5	151,54	20	60	800	60	8,88	10215-80		On request		●	
152,0	6	177,7	20	60	1100	60	10,50	10215-96		On request		●	
203,0	8	238	20	60	1700	40	18,75	10215-128		On request		●	